

# Template:FMC130 GPRS settings



## Contents

- [1 GPRS Settings](#)
- [2 FOTA WEB Settings](#)
- [3 TLS/DTLS](#)
  - [3.1 TLS/DTLS certificate generation](#)

## GPRS Settings

These settings define main parameters for FMB1YX: GSM operator *APN* and GPRS *Username* and *Password* (optional – depending on operator), destination server IP and port, and allows setting the protocol used for data transfers – **TCP** or **UDP**. SIM1 and SIM2 *GPRS Settings* can be configured separately. Backup server settings can also be selected for *Backup* server.

Backup server has 3 different modes:

- **Disable**: backup server is not used.
- **Backup**: records are sent to backup server if main server is not available (for example fails to open link) or when main server response timeout is reached successively 5 times.
- **Duplicate**: records are sent to both servers (main and backup), records are deleted from SD-card (or RAMS) only if both servers accepted the records.


Some operators use specific type of authentication for GPRS session – CHAP or PAP. If any of these is used, APN should be entered as "chap:<APN>" or "pap:<APN>" respectively e.g. if operator is using APN "internet" with CHAP authentication, it should be entered as "chap:internet". Information about APN and authentication type should be provided by your GSM operator.

FMB1YX device will send the newest records first when **Newest** is selected in *Records Settings*, which is useful in cases when the most important parameter set is the most recent one, as a result other records will be sent right after the newest records are received by AVL application. *Data Link Timeout* is used to set termination timeout for link between FMB1YX and AVL application. If FMB1YX has already sent all records it waits for the new records before closing the link (except for Deep Sleep mode, for more information refer to [Template:FMB Sleep modes#Deep Sleep mode](#)). If new records are generated during the period of this timeout and minimum count to send is reached, the records are sent to AVL application. This option is useful when GSM operator charges for link activation.

*Server Response Timeout* is used to set a period of time waiting for the response from server side.

## FOTA WEB Settings

These settings are used to configure FOTA WEB server connection parameters. *Status* enables or disables FOTA WEB functionality. Address and port number of FOTA website are entered to *Domain* and *Port* fields. *Period* is used to set the timeout of repeat connections to the FOTA WEB server.

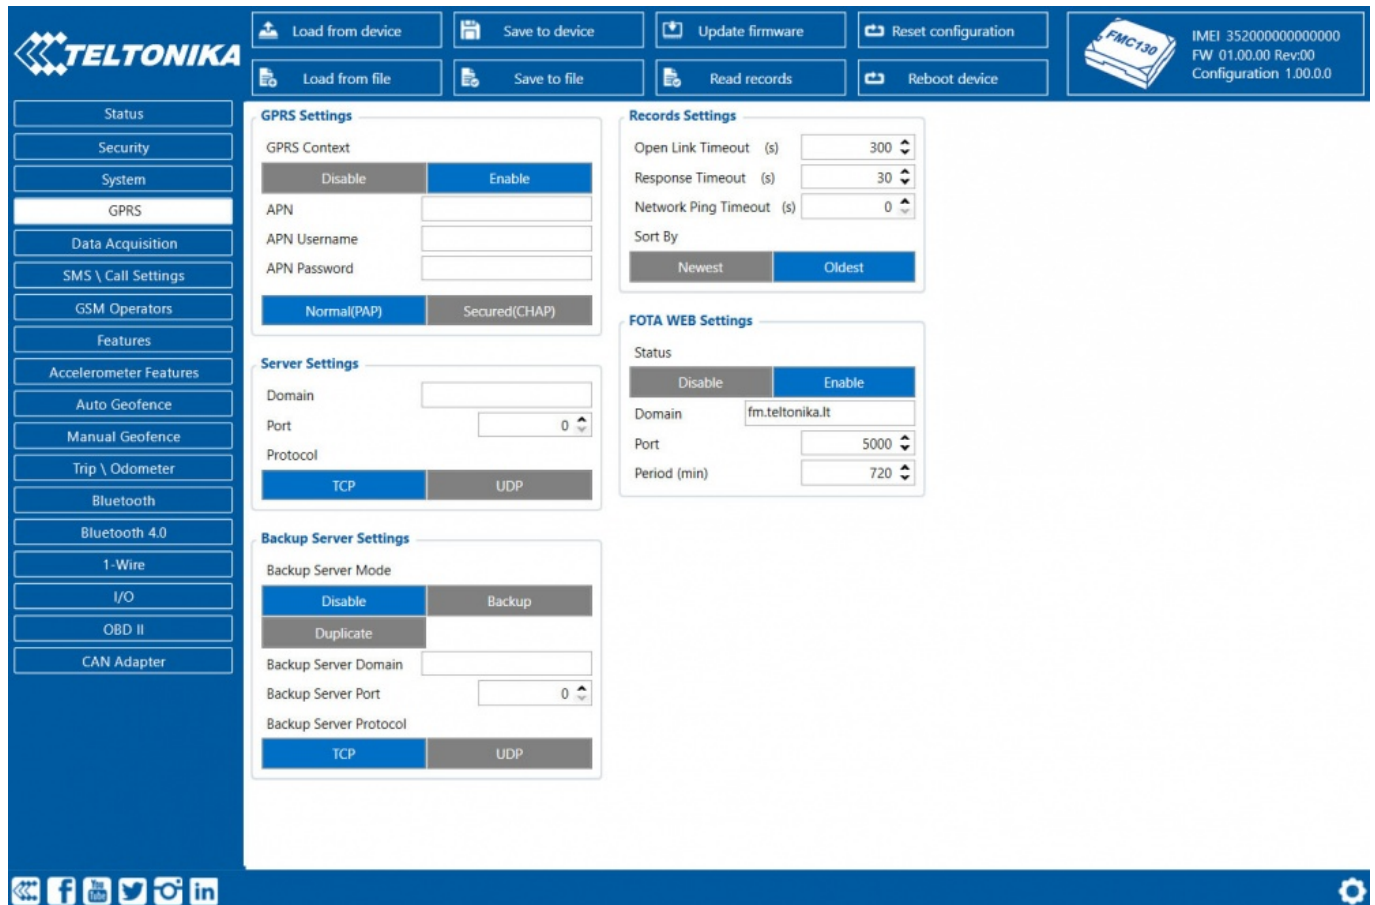

## TLS/DTLS

From 03.27.xx firmware version, TLD/DTLS functionality was implemented for FMB0YX, FMB9X0, FMB96X, FMB1YX, FMU1YX, FMM1YX, FMC1YX, FM30XY, FMB2YX, FMT100 device.

Supported versions: **1.1/1.2**

Status

Security

System

GPRS

Data Acquisition

SMS \ Call Settings

GSM Operators

Features

Accelerometer Features

Auto Geofence

Manual Geofence

Trip \ Odometer

Bluetooth

Bluetooth 4.0

Beacon List

1-Wire

I/O

OBD II

CAN Adapter

Device Info

Device Name FMB120	Last Start Time 1/1/2004 2:23:52 AM	Power Voltage 13600 mV.	Ext Storage (u 10 / 122 MB
Firmware Version 03.27.01 Rev:04	RTC Time 1/1/2004 2:44:16 AM	Device IMEI 352093086288965	Device Uptime 00:20:24

GNSS Info

GSM Info

I/O Info

Maintenance

GNSS Status

Module Status	GNSS Packets
ON	1206
Fix Status	Fix Time
No fix	00:00:00

Satellites

Visible:		In Use:	
GPS	GLONASS	GPS	GLONASS
0	0	0	0
BeiDou	Galileo	BeiDou	Galileo
0	0	0	0
IRNSS		IRNSS	
0		0	
Total In View		Total In Use	
0		0	

Local

Latit
0, 0
Spee
0 km

## TLS/DTLS certificate generation

Instructions cover how to generate an encryption certificate and how the device should be configured in order to send encrypted records into the client-server can be downloaded [HERE](#). **Server configuration and encryption certificate implementation is mandatory from the client-server side! }}**