


TAT_{xyz} BATTERY REPLACEMENT

HW version B2 – no hole on PCB


1. Remove the cap (use something thin enough to fit the groove)




2. Since there is no hole on the PCB we suggest using pliers covered with tape to protect the PCB

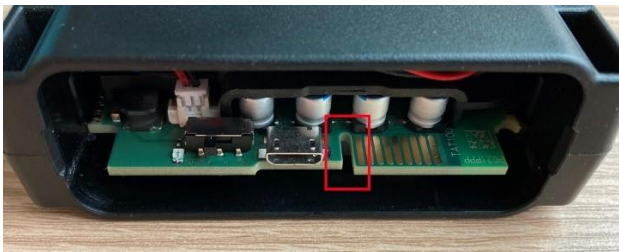


3. Remove the PCB using pliers gripping the shown area, taking care not to damage the contacts

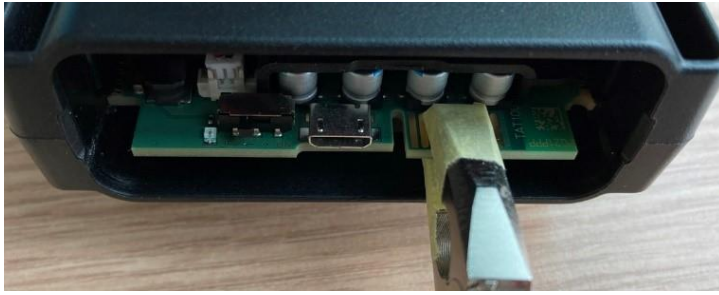


4. Unplug the battery

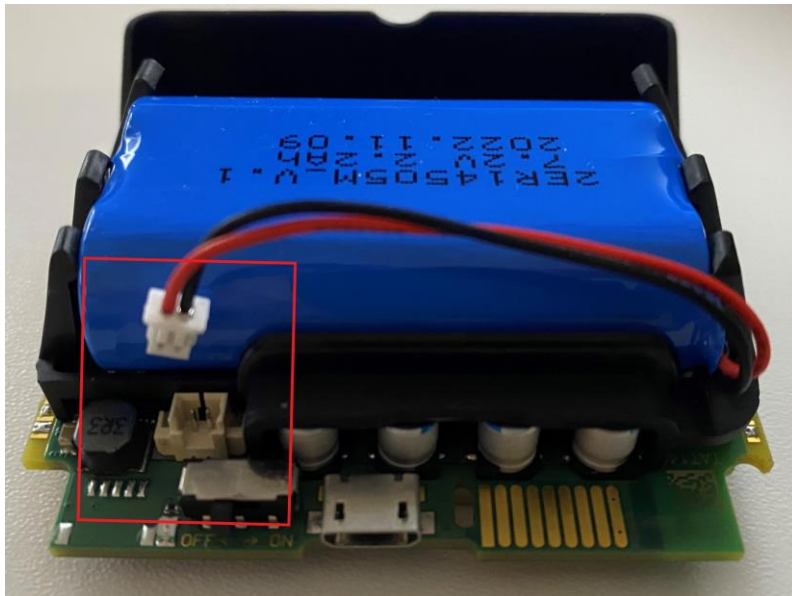

5. Take the battery out leaving the battery holder on the PCB

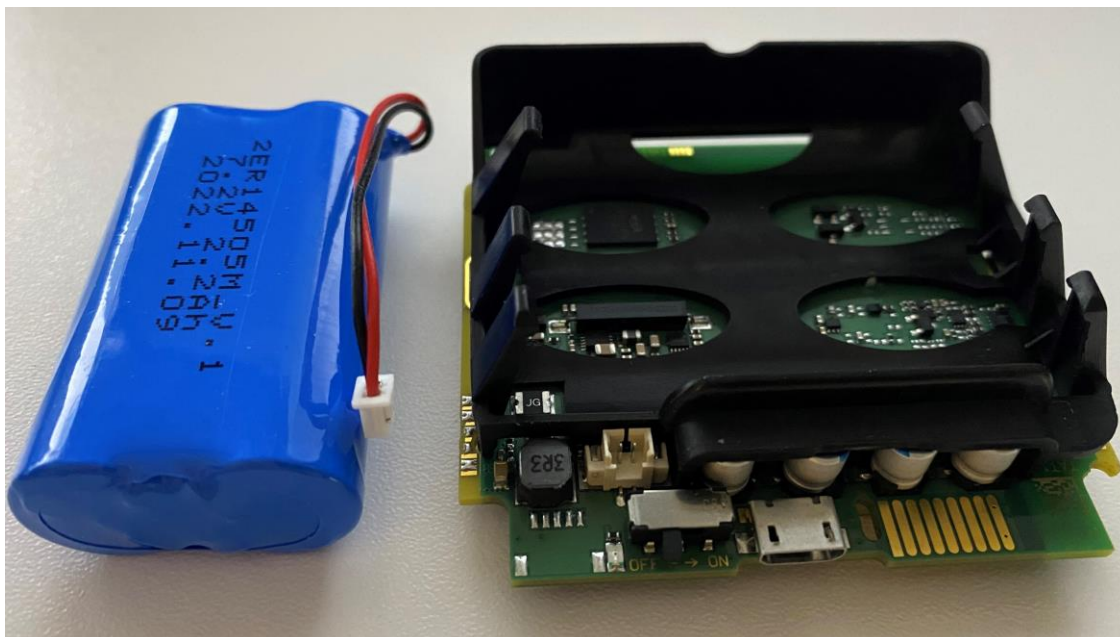

6. Place the new battery with cables facing the same way and connect it

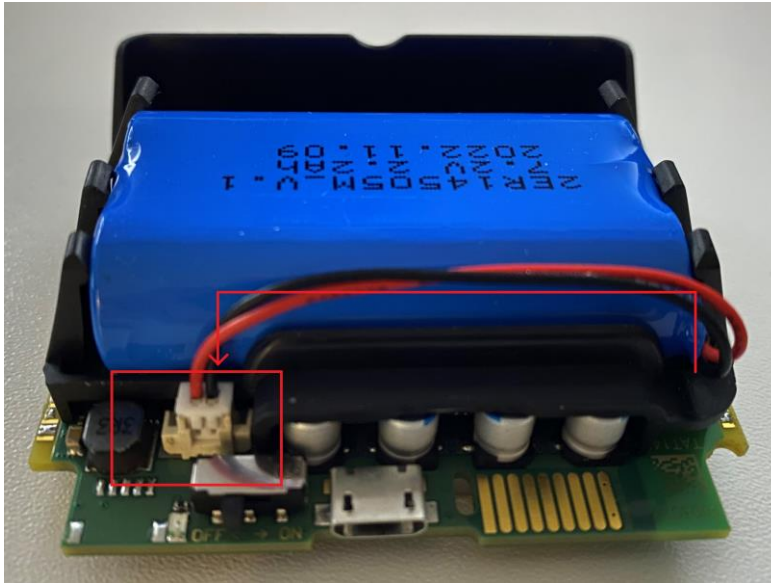

7. Place the PCB back into the housing with GNSS antenna facing the same side as the engraving on the case. Then close the cap.

