



FTC924

Next-generation 4G LTE Cat 1 vehicle GPS tracker with enhanced GNSS accuracy and Bluetooth[®] connectivity



Fleet telematics



Assets & workforce



Car sharing, rental & leasing

FT PLATFORM

Fleet Telematics (FT) platform offers advanced firmware and hardware, taking your tracking experience to the next level

HIGHER GNSS ACCURACY

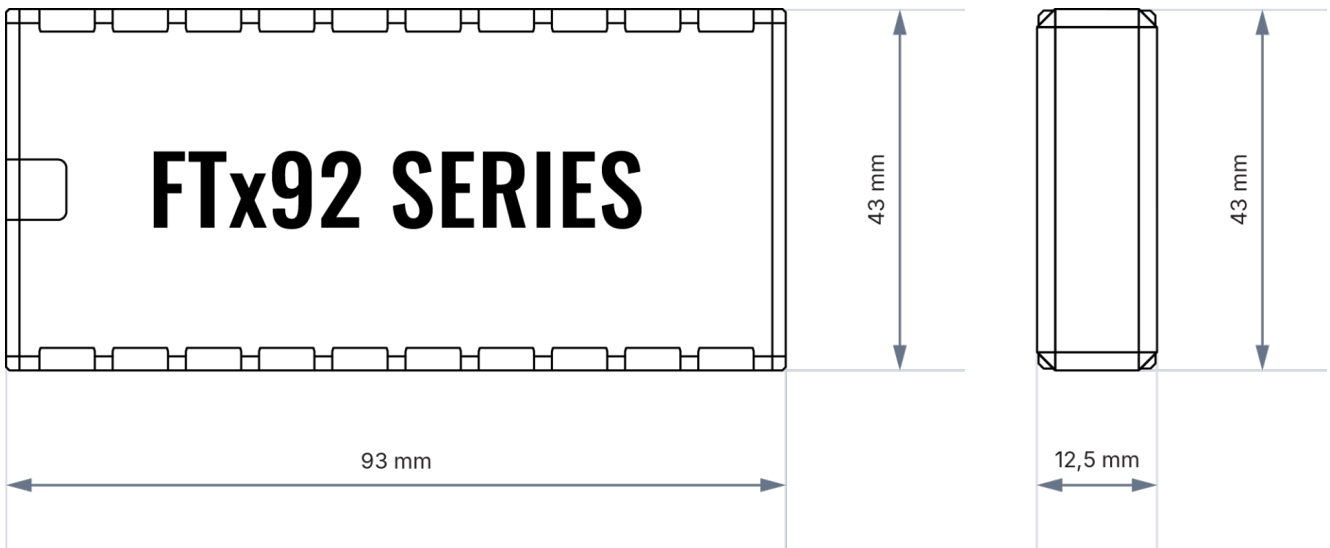
More precise GNSS with up to 41 visible satellites, enabling considerably higher tracking quality for location-based services

EXTENDED PRODUCT USAGE SCENARIOS

Bluetooth[®] 5.4 LE-based wireless connection of external devices, including Low Energy beacons and sensors, to monitor temperature, humidity, magnet detection, and movement

LONGER PERFORMANCE, SLOWER DRAINAGE

Optimised sleep modes allow the device to operate on its own for an extended period of time and significantly reduce vehicle battery drainage


Product

Model name	FTC924-QJAB0 FTC924-QKAB0
------------	--

Module

Name	FTC924-QJAB0 : EG915U-EU FTC924-AKAB0 : EG915U-LA
Technology	LTE CAT 1/GSM/GPRS/GNSS/BLUETOOTH® LE

GNSS

GNSS	GPS, GLONASS, GALILEO, BEIDOU
Receive type	135 tracking/acquisition channels
Tracking sensitivity	-165 dBm
Position Accuracy	< 1.8 m CEP
Velocity Accuracy	< 0.1 m/s (within +/- 15% error)
Hot start	< 1 s
Warm start	< 25 s

Cellular

Technology	LTE CAT 1/GSM
2G bands	FTC924-QJAB0: GSM: B2/B3/B5/B8 FTC924-QKAB0: GSM: B2/B3/B5/B8
4G LTE bands	FTC924-QJAB0: LTE FDD (EG915U-EU): B1/B3/B5/B7/B8/B20/B28 FTC924-QKAB0: LTE FDD (EG915U-LA): B2/B3/B4/B5/B7/B8/B28/B66
Data transfer	LTE FDD (CAT 1): Max. 10 Mbps (DL) / Max. 5 Mbps (UL) GSM (GPRS): Max. 85.6 Kbps (DL) / Max. 85.6 Kbps (UL)
Transmit power	Class 5 for GSM850/900: 30±5dBm Class 3 for GSM1800/1900: 29±5dBm Class 3 for LTE-FDD: 26±5dBm
Data support	SMS (TEXT, PDU), Network protocols (TCP)

Data codec

Codec support	Codec 8 Extended
---------------	------------------

Power

Input voltage range	10-30 V
Internal Back-up battery	170 mAh Li-Ion battery, 3.7 V (0.63 Wh)
Internal fuse	3A, 125V
Power consumption	At 12V < 25 mA (nominal with no load) At 12V < 0.25A Max (with full Load/Peak)

Bluetooth® Technology

Specification	5.4 + LE
Supported peripherals	EYE beacon and sensor

Physical specification

Dimensions	93 x 43 x 12.5 mm (L x W x H)
Weight	65 g

Operating environment

Operating temperature	-30 °C to +85 °C
Storage temperature	-30 °C to +85 °C
Operating humidity	65 ± 20% non-condensing
Battery charge temperature	0 °C to +45 °C
Battery discharge temperature	-20 °C to +60 °C
Battery storage conditions	-10 °C to +50 °C for 1 month -10 °C to +35 °C for 3 months 0 °C to +30 °C for 1 year

Interface

Digital Inputs	1
Digital Outputs	1
Analog Inputs	1
GNSS antenna	Internal High Gain
Cellular antenna	Internal High Gain
USB	USB 2.0 USB Type-C
LED indication	2 status LED lights
SIM	Nano-SIM
Memory	128MB internal flash memory

Features

Sensors	Accelerometer
Scenarios	Crash Detection, Over Speeding, Trip, Odometer, Eco Driving, Excessive idling, Network Jamming Detection, Unplug Detection, Auto Geofence, Towing Detection, Static Navigation, Custom Scenarios
Sleep modes	Online sleep, Deep sleep, Power off sleep
Configuration and firmware update	FOTA WEB, Teltonika Configuration Tool (TCT)
SMS	Configuration, DOUT control, Debug
GPRS commands	Configuration, DOUT control, Debug
Time Synchronization	GNSS, NITZ, NTP
Ignition detection	Digital Input 1, Accelerometer, External Power Voltage

Certification & approvals

Regulatory	CE/RED, E-Mark, RCM, RoHS, REACH, Pulse 5b (in progress)
------------	--