

DashCam Camera Manual


[Main Page](#) > [Video Solutions](#) > [Teltonika DashCam](#) > **DashCam Camera Manual**

□

Contents

- [1 Package contents](#)
- [2 Important Set-up links](#)
- [3 Product Specification](#)
- [4 DashCam data transfer timing](#)

Package contents

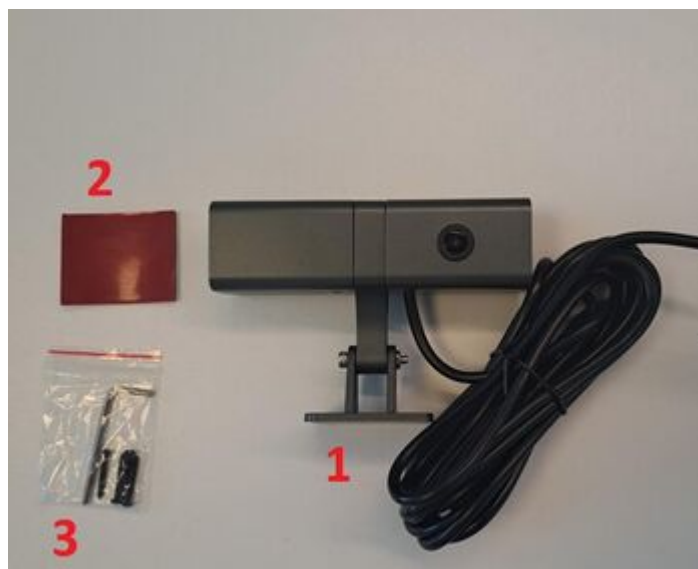

There are several components included in the DashCam package box. These components are necessary to set up the camera and make it functional part of the vehicle.

- 1. Teltonika DashCam** - the main camera unit used to record video/pictures. This unit has cable attached to it for connection purposes e.g. powering up and data transmission.
- 2. Sticky Tape 3M** - option no. 1, a double sided sticky tape that can be used to stick the camera unit to the windscreen, this will allow it to be taken off later on without traces.
- 3. Screws** - option no. 2, screws which can be used to screw the camera unit into the designated place just above the windscreen (should not be used on windows).

Important Set-up links

1. [First Start](#) - in this section it is described how to set up the camera before first use. It is essential to know the process as without certain set-up processes the camera will not start or certain functions will not be accessible.
2. [DashCam Configuration](#) - this section describes the navigational way inside of the configurator which will be the main tool to set up the camera with the tracking device and make it functional.
3. [DashCam Communication Protocol](#) - is used when setting up file upload to servers for quick downloading of data. It is essential part and functionality of the FMX tracking devices family which allows the users to upload data and files from the device effortlessly.
4. [DashCam SMS commands](#) - in this section there are SMS sending commands which will help the user by providing easier access to command the device, or request information from it.
5. [DashCam Firmware errata](#) - every once in a while an update comes out which improves the functionalities of the DashCam systems and even introduces new ones. It is important to keep track of what is released in order to receive the most out of your DashCam solution.
6. [DashCam FAQ](#) - sometimes there will be rising questions to which the answers can not always be found. So a FAQ page has been released in order to collect non-standard information and potentially solve issues that the client might be facing.

Product Specification


Technical data	Description
Supported by	FMC125, FMB125, FMB225, FMC225
Day	Day (Color)
Angle of View	Horizontal 120°, Vertical 70°
DashCam	Front (equal characteristics)
Camera casing dimensions	126.2 x 36.6 x 36.6 mm
Camera mounting	Sticky tape (3M) or screws
Supported microSD card sizes	16 GB, 32 GB, 64 GB, 128 GB
Microphone	Voice recording (Not installed in standard modification. Can be added on demand)

Electrical parameters	Description
Input voltage range	9 ~ 36 V
Working temperature and humidity	Temperature: -30 °C ~ 85 °C Humidity: <90%
Power consumption	80 mA

Function parameters	Description
Real time clock (RTC) synchronization	Available over FM (via NTP, NITZ or GNSS)

Picture resolution	1280 x 720 (default) , Configurable: 160 x 120; 320 x 240; 640 x 480; 1920 x 1080
Cable length	RS232 (3.5 m)
Video compression	H.265
Video resolution	720P
Video storage	1psc. MicroSD card (Max 128GB up to 72 hours of video)

DashCam data transfer timing

Image resolution	Image compression (%)	Video duration (s)	Size of image	Size of video		Time interval (s) from trigger to files received on device	Photo examples
				FMC125 4G / FMB125 2G	FMC125 4G / FMB125 2G		
640x480	0	-	130KB	-	-	21s / 48s	
640x480	50	-	23KB	-	-	5s / 24s	
640x480	100	-	7KB	-	-	3s / 16s	
1280x720	0	-	350KB	-	-	53s / 90s	
1280x720	50	-	53KB	-	-	10s / 33s	
1280x720	100	-	17KB	-	-	5s / 17s	
1920x1080	0	-	764KB	-	-	121s / 179s	
1920x1080	50	-	100KB	-	-	17s / 39s	
1920x1080	100	-	37KB	-	-	7s / 28s	
1280x720	-	5 front	-	-	Front mp4 - 570KB, h265-495KB	76s / 102s	
1280x720	-	10 front	-	-	Front mp4 - 1140KB, h265-990KB	151s / 204s	
1280x720	-	15 front	-	-	Front mp4 - 1710KB, h265-1485KB	227s / 307s	
1280x720	-	30 front	-	-	Front mp4 - 3420KB, h265-2970KB	453s / 613s	

* **NOTE:** This approximate time which we receive during testing in real cases can be different.

* **NOTE** Image compression is a type of data compression applied to digital images, to reduce their cost for storage or transmission. Algorithms may take advantage of visual perception and the statistical properties of image data to provide superior results compared with generic data compression methods which are used for other digital data.