

FM3612 I/O settings

[Main Page](#) > [EOL Products](#) > [FM3612](#) > [FM3612 Configuration](#) > [FM3612 I/O settings](#)

FM3612 sends SMS event message when a configured I/O property enters and/or exits its configured High/Low boundaries or Hysteresis event generation is chosen (Monitoring does not generate event, so SMS event could not be configured).

System	I/O	Property Input	Enabled	Priority	Low Level	High Level	Units	Generate Event	Averaging Constant
Records	Digital input 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	High	0	1		On Both	10
GSM	Digital input 2	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10
DataAcquisitionModes	Digital input 3	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10
Features	Digital input 4	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10
IO	Analog input 1	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	2
LVCAN	Digital output 1	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10
	Digital output 2	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10
	GNSS PDOP	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10
	GNSS HDOP	<input type="checkbox"/>	<input type="checkbox"/>	Disat	0	0		Monitoring	10

Every IO element SMS event can be configured to send individual message to different numbers.

System	SMS Events	Description	Enable	SMS Number	SMS Text
Records	Digital input 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	37061234567	Digital Input 1
GSM	Digital input 2	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	Digital Input 2
> GPRS	Digital input 3	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	Digital Input 3
> SMS	Digital input 4	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	Digital Input 4
> SMS Events	Analog input 1	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	Analog Input 1
> Operator list	Digital output 1	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	Digital Output 1
DataAcquisitionModes	Digital output 2	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	Digital Output 2
	GNSS PDOP	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	GNSS PDOP
	GNSS HDOP	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	GNSS HDOP
	External voltage	<input type="checkbox"/>	<input type="checkbox"/>	37061234567	External Voltage

When no I/O element is enabled, AVL packet comes with GNSS information only. After enabling I/O element(s) AVL packet along with GNSS information contains current value(s) of enabled I/O element.

Permanent I/O elements (are always sent to server if enabled)

No.	Property Name	Description
00	Digital Input Status 1	Logic: 0 / 1
01	Digital Input Status 2	Logic: 0 / 1
02	Digital Input Status 3	Logic: 0 / 1
03	Digital Input Status 4	Logic: 0 / 1
04	Analog Input 1	Voltage: mV, 0 - 30 V

05	Digital Output 1	Logic: 0 / 1
06	Digital Output 2	Logic: 0 / 1
07	GNSS PDOP	Probability * 10; 0-500
08	GNSS HDOP	Probability * 10; 0-500
09	External Voltage	Voltage: mV, 0 - 30 V
10	GNSS Power	States: 0 - off state (when GPS module is off) 1 - Reserved 2 - GPS ready (antenna is working, but with no GPS fix) 3 - GPS working (antenna is working and has GPS fix) 4 - GPS sleep (when device is in GPS sleep mode) 5 - Overcurrent (The only condition to get value 5, then antenna is damaged and short circuit) 0 - not moving, 1 - moving.
11	Movement Sensor	Distance between two records: m
12	Odometer Value	Currently used GSM Operator code
13	GSM Operator	Value in km/h, 0 - xxx km/h
14	Speed (Km/h)	iButton ID number
15	iButton ID	0 - home on stop, 1 - home on move, 2 - roaming on stop, 3 - roaming on move, 4 - unknown on stop, 5 - unknown on move
16	Mode	GSM signal level value in scale 1 - 5
17	GSM Signal	0 - not deep sleep mode, 1 - deep sleep mode
18	Deep Sleep	GSM base station ID
19	Cell ID	Location Area code (LAC), it depends on GSM operator. It provides unique number which assigned to a set of base GSM stations.
20	Area Code	Max value: 65536
21	Dallas Temperature 1	10 * Degrees (°C), -55 - +115, if 3000 - Dallas error
22	Dallas Temperature 2	10 * Degrees (°C), -55 - +115, if 3000 - Dallas error
23	Dallas Temperature 3	10 * Degrees (°C), -55 - +115, if 3000 - Dallas error
24	Battery Voltage	Voltage: mV
25	Battery Charging Current	Current: mA
26	Ignition	Ignition status indication. Logic: 0 / 1
27	Network Type	0 - 3G network, 1 - 2G network
28	Continuous Odometer	Distance which device has been traveled with ignition ON: m
29	Dallas temperature ID1	1st connected dallas temperature sensor ID
30	Dallas temperature ID2	2nd connected dallas temperature sensor ID
31	Dallas temperature ID3	3rd connected dallas temperature sensor ID
Eventual I/O elements (generate and send record to server only if appropriate conditions are met)		
32	Geofence zone 01	Event: 0 - target left zone, 1 - target entered zone
33	Geofence zone 02	Event: 0 - target left zone, 1 - target entered zone
34	Geofence zone 03	Event: 0 - target left zone, 1 - target entered zone
35	Geofence zone 04	Event: 0 - target left zone, 1 - target entered zone
36	Geofence zone 05	Event: 0 - target left zone, 1 - target entered zone

37	Auto Geofence	Event: 0 - target left zone, 1 - target entered zone
38	Trip	1 - trip start, 0 - trip stop
39	Immobilizer	1 - iButton connected
40	Authorized driving	1 - authorized iButton connected
41	Green driving type	1 - harsh acceleration, 2 - harsh braking, 3 - harsh cornering
42	Green driving value	Depending on green driving type: if harsh acceleration or braking - g*100 (value 123 -> 1.23g), if harsh cornering - degrees (value in radians)
43	Over Speeding	At over speeding start km/h, at over speeding end km/h
44	LVCAN Speed	Value in km/h, 0 - 250 km/h
45	LVCAN Accelerator pedal position	Value range: 0-100 %
46	LVCAN Total fuel used	Value range: 0- 99999999 liters* "Total Fuel Used" is sent to server multiplied by 10. Example: if value was 150.5 liters, "1505" will be sent to server.
47	LVCAN Fuel level (liters)	Value range: 0-100 liters
48	LVCAN Engine RPM	Value range: 0-8200 rpm
49	LVCAN Vehicle distance	Value range: 0-2145000000 meters
50	LVCAN Fuel level (proc.)	Value range: 0-100 %
51	LVCAN Program number	Value range: 0-999
52	LVC ModuleID	Value range: 0-max
53	LVC Engine Work Time	Value range: 0-4294967295
54	LVC Engine Work Time (counted)	Value range: 0-4294967295
55	LVC Total Mileage (counted)	Value range: 0-4294967295
56	LVC Fuel Consumed (counted)	Value range: 0-4294967295
57	LVC Fuel Rate	Value range: 0-4294967295
58	LVC AdBlue Level (percent)	Value range: 0-4294967295
59	LVC AdBlue Level (liters)	Value range: 0-255
60	LVC Engine Load	Value range: 0-65535
61	LVC Engine Temperature	Value range: 0-65535
62	LVC Axle 1 Load	Value range: 0-255
63	LVC Axle 2 Load	Value range: 0-65535
64	LVC Axle 3 Load	Value range: 0-65535
65	LVC Axle 4 Load	Value range: 0-255
66	LVC Axle 5 Load	Value range: 0-65535
67	LVC Control State Flags	Value range: 0-255
68	LVC Agricultural Machinery Flags	Value range: 0-255
69	LVC Harvesting Time	Value range: 0-65535
70	LVC Area of Harvest	Value range: 0-65535
71	LVC Mowing Efficiency	Value range: 0-65535
72	LVC Grain Mown Volume	Value range: 0-65535
73	LVC Grain Moisture	Value range: 0-65535
74	LVC Harvesting Drum RPM	Value range: 0-4294967295
75	LVC Gap Under Harvesting Drum	Value range: 0-max

76	LVC Security State Flags	Value range: 0-4294967295
77	LVC Tacho Total Vehicle Distance	Value range: 0-4294967295
78	LVC Trip Distance	Value range: 0-4294967295
79	LVC Tacho Vehicle Speed	Value range: 0-4294967295
80	LVC Tacho Driver Card Presence	Value range: 0-65535
81	LVC Driver1 States	Value range: 0-65535
82	LVC Driver2 States	Value range: 0-255
83	LVC Driver1 Continuous Driving Time	Value range: 0-max
84	LVC Driver2 Continuous Driving Time	Value range: 0-4294967295
85	LVC Driver1 Cumulative Break Time	Value range: 0-4294967295
86	LVC Driver2 Cumulative Break Time	Value range: 0-65535
87	LVC Driver1 Duration Of Selected Acti	Value range: 0-255
88	LVC Driver2 Duration Of Selected Acti	Value range: 0-255
89	LVC Driver1 Cumulative Driving Time	Value range: 0-255
90	LVC Driver2 Cumulative Driving Time	Value range: 0-65535
91	LVC Driver1 ID High	Value range: 0-65535
92	LVC Driver1 ID Low	Value range: 0-65535
93	LVC Driver2 ID High	Value range: 0-65535
94	LVC Driver2 ID Low	Value range: 0-65535
95	LVC Battery Temperature	Value range: 0-65535
96	LVC Battery Level (percent)	Value range: 0-65535

Note: There are two types of operations with Permanent I/O elements: simple monitoring and event generating. Monitoring method is used when current I/O information needed with regular GNSS coordinates. Event generating method is used when additional AVL packet is needed when current value of I/O exceeds predefined High and Low levels. I/O settings allow defining I/O event criteria.

System	I/O						
	Property Input	Enabled	Priority	Low Level	High Level	Generate Event	Averaging Constant
Records							
GSM	GNSS PDOP	<input type="checkbox"/>	Disabl	0	0	Monitoring	10
	GNSS HDOP	<input type="checkbox"/>	Disabl	0	0	Monitoring	10
DataAcquisitionModes	External voltage	<input type="checkbox"/>	Disabl	10000	30000	On Exit	10
	GNSS power	<input type="checkbox"/>	Disabl	0	0	Monitoring	
Features	Movement sensor	<input type="checkbox"/>	Disabl	0	0	Monitoring	10
IO	Odometer value	<input type="checkbox"/>	Disabl	0	0	Monitoring	
	GSM operator	<input type="checkbox"/>	Disabl	0	0	Monitoring	
	Speed (km/h)	<input type="checkbox"/>	Disabl	0	0	Monitoring	60
LVCAN	iButton ID	<input type="checkbox"/>	Disabl	0	5	On Entrance	10
	Mode	<input type="checkbox"/>	Disabl	0	0	Monitoring	

Enabled or disabled field – allows enabling I/O element so it is added to the data packet and is sent to the server. By default all I/O element are disabled and FM3612 records only GNSS coordinates.

Priority (AVL packet priority) can be low, high or panic. Regular packets are sent as Low priority records. When low priority event is triggered, FM3612 makes additional record with indication that the reason for that was I/O element change. When High priority is selected, module makes additional

record with high priority flag and sends event packet immediately to the server by GPRS. Panic priority triggers same actions as high priority, but if GPRS fails, it sends AVL packet using SMS mode if SMS is [enabled in SMS settings](#).

High and Low levels – define I/O value range. If I/O value enters or exits this range, FM3612 generates event. “Generate event” parameter defines when to generate event – when value enters defined range, exits it or both.

Averaging constant – it is an I/O event delay parameter. In some applications there is no need to generate events on every I/O range enter/exit immediately. Sometimes it is necessary to wait some time interval before event generating. Averaging constant allows setting I/O event delay (averaging). If I/O value is entering or leaving predefined range, it must have same value for Averaging constant time. 1 Averaging constant value equals about 30 miliseconds. In Deep Sleep mode there is no Averaging.

Note: Note: I/O element’s “Movement sensor” Averaging constant is interpreted as Start Move
 Timeout in seconds (from 1 to 59). Start Move Timeout – is a time interval required for movement sensor to be in the moving state, to consider vehicle as moving.

Monitoring


I/O monitoring starts after enabling I/O element and setting up I/O parameters as it is shown below:

System		I/O							
	Property Input	Enabled	Priority	Low Level	High Level	Units	Generate Event	Averaging Constant	
Records	Digital input 1	<input checked="" type="checkbox"/>	Low	0 ▲	1 ▲		Monitoring	10 ▲	
GSM	Digital input 2	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	
DataAcquisitionModes	Digital input 3	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	
Features	Digital input 4	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	
IO	Analog input 1	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	2 ▲	
LVCAN	Digital output 1	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	
	Digital output 2	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	
	GNSS PDOP	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	
	GNSS HDOP	<input type="checkbox"/>	Disat	0 ▲	0 ▲		Monitoring	10 ▲	

Event generating

Events happen when the value of enabled I/O intersects thresholds (enter, exit or on both) predefined by High and Low level thresholds. Table below defines all available values of I/O settings.

Setting	Value
Priority	low, high
High level	maximum threshold
Low level	minimum threshold
Generate event	on interval enter, on interval exit, on both enter and exit
Average constant	1 - 2 ³² (4 Bytes)

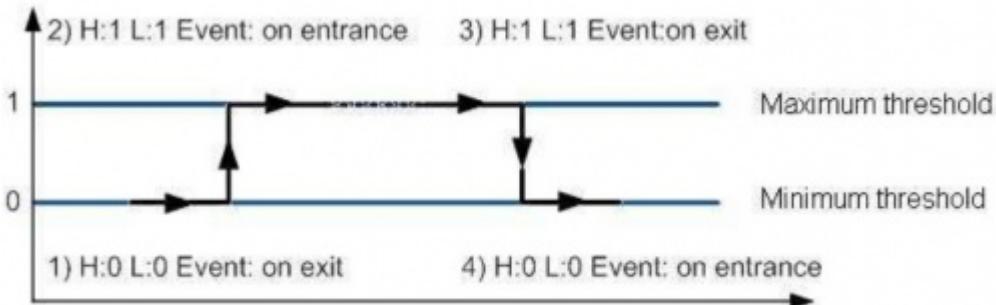

Hysteresis



I/O elements can generate events according to hysteresis algorithm. If I/O event operand "Hysteresis" is selected, events will be generated as it is shown in the illustration below (I/O speed is taken as I/O value example):

