

FMC125 General description

[Main Page](#) > [Professional Trackers](#) > [FMC125](#) > [FMC125 Manual](#) > **FMC125 General description**

FMC125 is a tracking terminal with GNSS and GSM connectivity, which is able to collect device coordinates and transfer them via GSM network to a server. This device is perfectly suitable for applications, which require the location acquirement of remote objects.

□

Contents

- [1 Package contents](#)
- [2 Basic characteristics](#)
- [3 Technical features](#)
- [4 Technical information about internal battery](#)
- [5 Electrical characteristics](#)
- [6 Absolute maximum ratings](#)

Package contents

The FMC125 device is supplied to the customer in a cardboard box containing all the equipment that is necessary for operation. The package contains:

- FMC125 device;
- Input and output power supply cable with 2x6 connection pins;
- Micro USB cable;
- 3.7 V 170 mAh rechargeable Li-ion battery;

Basic characteristics

GSM / GPRS / GNSS features:

- Name MeiG SLM320-E, MeiG SLM320-LA, Quectel EC21-EC, Quectel EC21-AU, Quectel EC21-J, Quectel EC21-KL, Teltonika TM2500;
- Technology LTE(Cat1)/3G(UMTS/HSPA)/2G(GSM/GPRS)/GNSS(BLUETOOTH);
- SMS (text, data);
- Integrated GNSS receiver;
- Up to -165 dBm GNSS receiver sensitivity.

Hardware features:

- Built-in movement sensor;
- Built-in Bluetooth 4.0 LE;
- Internal High Gain GNSS antenna;
- Internal High Gain GSM antenna;
- Internal flash memory 128MB (422 400 Records);

- 170 mAh Li-ion rechargeable 3.7 V battery.

Interface features:

- Power supply: +10... +30 V;
- 2 digital inputs;
- 1 analog input;
- 1 open collector digital output (connecting external relays, LED, buzzers etc);
- 1-Wire temperature sensor;
- 1-Wire iButton;
- LVCAN RX (INPUT 5);
- LVCAN TX (INPUT 6);
- 1 RS-232 interface;
- 1 RS-485 interface;
- 2 LEDs indicating device status.

Special features:

- Fast position fix (Outdoor areas);
- High Quality track even in high density urban canyon;
- Ultra small case;
- Ready for harsh environment;
- Easy to mount in limited access areas;
- Firmly fasten;
- 2 LED status indication;
- Real time tracking;
- Smart data acquisition based on:
 - Time;
 - Speed;
 - Angle;
 - Distance;
 - Ignition or any other I/O event;
- Sending acquired data via GPRS;
- GPRS and SMS I/O events;
- Virtual odometer;
- Jamming detection;
- Configurable using Secured SMS Commands;
- 2xSIM Card (Dual-SIM)
- Overvoltage protection;

Description	Voltage	Duration
Normal operation	+10 ... +30 V	Unlimited
Protection turns on, device turns off	34 V	Unlimited
Maximum voltage	< 70 V	Unlimited
Maximum voltage impulse	90 V	5 ms


Technical features

Part name	Physical specification
Navigation indication	LED
Modem indication	LED
Socket	Soldered inner socket
USB	Micro USB socket
GNSS	Internal GNSS antenna
GSM	Internal GSM antenna

Technical details

2 W max.	GPRS: average 64.59 mA rms
Current consumption at 12 V (Power supply 6...30 V DC)	Nominal: average 37.77 mA
	GNSS sleep: average 11.1 mA
	Deep Sleep: average 6.2 mA
	Online Deep Sleep: average 6.5 mA
Battery charge current	Average 140 mA
Operating temperature (without battery)	-20..+85 °C
Storage temperature (without battery)	-20..+85 °C
Storage relative humidity	5..95% (no condensation)
Device + case + battery weight	62 g

Dimension drawing:

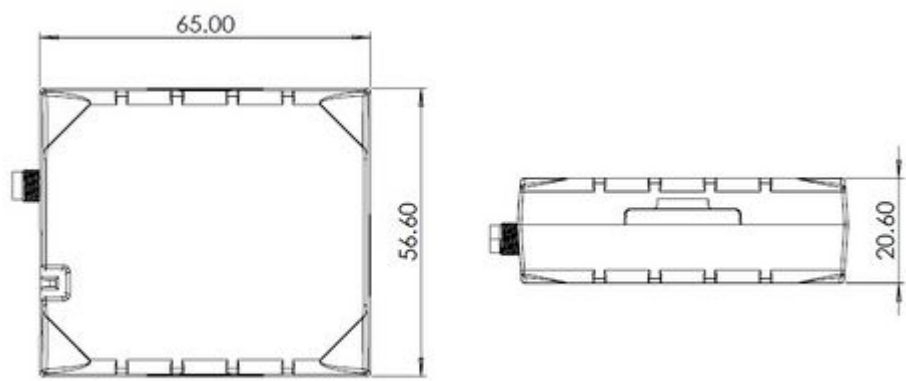


Technical information about internal battery

Internal back-up battery	Battery voltage (V)	Nominal Capacity (mAh)	Power (Wh)	Charge temperature (°C)	Discharge temperature (°C)	Storage temperature (°C)
Li-ion rechargeable battery	3.75~3.90	170	0.64 - 0.66	0 to +45	-20 to +60	-20 to +45 for 1 month -20 to +35 for 6 months

Batteries are covered by 6 month [warranty](#) support.

-  CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Battery should not be disposed of into general household waste.

-  Bring damaged or worn-out batteries to your local recycling center or dispose them into a battery recycle bin commonly found in supermarkets.

Electrical characteristics

Characteristic description	Value		Unit
	Min.	Typ. Max.	
Supply Voltage:			
Supply Voltage (Recommended Operating Conditions)	+10	+30	V
Digital Output (Open Drain grade):			
Drain current (Digital Output OFF)		120	μA
Drain current (Digital Output ON, Recommended Operating Conditions)	0.1	0.5	A
Static Drain-Source resistance (Digital Output ON)	400	600	mΩ
Digital Input:			
Input resistance (DIN1)	47		kΩ
Input resistance (DIN2)	51.7		kΩ
Input voltage (Recommended Operating Conditions)	0	Supply voltage	V
Input Voltage threshold (DIN1)	7.5		V
Input Voltage threshold (DIN2)	2.5		V
Analog Input:			
Input voltage (Recommended Operating Conditions), Range 1	0	+10	V
Input resistance, Range 1	150		kΩ

Measurement error on 12V, Range 1	3	%
Additional error on 12 V, Range 1	360	mV
Measurement error on 30 V, Range 1	3	%
Additional error on 30 V, Range 1	900	mV
Input Voltage (Recommended Operating Conditions), Range 0 2	+30	V
Input resistance, Range 2	150	kΩ
Measurement error on 12V, Range 2	3	%
Additional error on 12 V, Range 2	360	mV
Measurement error on 30 V, Range 2	3	%
Additional error on 30 V, Range 2	900	mV
Output Supply Voltage 1-Wire:		
Supply voltage	+4.5	+4.7 V
Output inner resistance	7	Ω
Output current ($U_{out} > 3.0\text{ V}$)	30	mA
Short circuit current ($U_{out} = 0$)	75	mA
RS232/RS485 Input Voltage:		
RS485 input voltage range on A or B pin (common-mode voltage)	-7	+12 V
RS232 input voltage range (common-mode voltage)	-15	+15 V

✖ **Analog Input error margin can increase if temperature varies.**

Absolute maximum ratings

}}

Characteristic description	Value		
	Min.	Typ.	Max. Unit
Supply Voltage (Absolute Maximum Ratings)	-32	+32	V
Drain-Source clamp threshold voltage (Absolute Maximum Ratings), ($I_{drain} = 2\text{ mA}$)		+36	V
Digital Input Voltage (Absolute Maximum Ratings)	-32	+32	V
Analog Input Voltage (Absolute Maximum Ratings)	-32	+32	V
RS232 Input Voltage (Absolute Maximum Ratings)	-25	+25	V