

FMU125 General description

[Main Page](#) > [EOL Products](#) > [FMU125](#) > [FMU125 Manual](#) > **FMU125 General description**

FMU125 is small and professional real-time tracking terminal with GNSS and 3G/GSM connectivity and backup battery. Device equipped with GNSS/Bluetooth and 3G modules, internal GNSS and internal 3G antennas. FMU125 feature RS232 data interface, which gives ability to connect various third-party external devices. It is perfectly suitable for applications where location acquirement of remote objects is needed: fleet management, car rental companies, taxi companies, public transport, logistics companies, personal cars and so on.

□

Contents

- [1 Package contents](#)
- [2 Basic characteristics](#)
- [3 Technical features](#)
- [4 Technical information about internal battery](#)
- [5 Electrical characteristics](#)
- [6 Absolute maximum ratings](#)

Package contents

The FMU125 device is supplied to the customer in a cardboard box containing all the equipment that is necessary for operation. The package contains:

- FMU125 device;
- Input and output power supply cable with 2x6 connection pins;
- Micro USB cable;
- 3.7 V 170 mAh rechargeable Li-ion battery.

Basic characteristics

GSM / GPRS / GNSS features:

- Quectel UC15-A/UC15-T or Quectel UG96, TM2500 (3G(UMTS/HSPA)/2G(GSM/GPRS)/GNSS/BLUETOOTH);
- GPRS Multi-Slot class 12 (Up to 240 kbps);
- SMS (text, data);
- Integrated GNSS receiver;
- Up to -165 dBm GNSS receiver sensitivity.

Hardware features:

- Built-in movement sensor;
- Built-in Bluetooth 4.0 LE;

- Internal High Gain GNSS antenna;
- Internal High Gain GSM antenna;
- Internal flash memory 128MB (422 400 Records);
- 170 mAh Li-ion rechargeable 3.7 V battery (0.63 Wh).

Interface features:

- Power supply: +10... +30 V;
- 2 digital inputs;
- 1 analog input;
- 1 open collector digital output (connecting external relays, LED, buzzers etc);
- 1-Wire temperature sensor;
- 1-Wire iButton;
- LVCAN RX (INPUT 5);
- LVCAN TX (INPUT 6);
- 1 RS-232 interface;
- 1 RS-485 interface;
- 2 LEDs indicating device status.

Special features:

- Fast position fix (Outdoor areas);
- High Quality track even in high density urban canyon;
- Ultra small case;
- Ready for harsh environment;
- Easy to mount in limited access areas;
- Firmly fasten;
- 2 LED status indication;
- Real time tracking;
- Smart data acquisition based on:
 - Time;
 - Speed;
 - Angle;
 - Distance;
 - Ignition or any other I/O event;
- Sending acquired data via GPRS;
- GPRS and SMS I/O events;
- Virtual odometer;
- Jamming detection;
- Configurable using Secured SMS Commands;
- 2xSIM Card (Dual-SIM)
- Overvoltage protection;

Technical features


| Part name | Physical specification |
|------------------|-------------------------------|
|------------------|-------------------------------|

| | |
|-----------------------|-----------------------|
| Navigation indication | LED |
| Modem indication | LED |
| Socket | Soldered inner socket |
| USB | Micro USB socket |
| GNSS | Internal GNSS antenna |
| GSM | Internal GSM antenna |

Technical details

| | |
|---|-----------------------------------|
| 2 W max. | GPRS: average 64.59 mA rms |
| Current consumption at 12 V (Power supply 10...30 V DC) | Nominal: average 37.77 mA rms |
| | GNSS sleep: average 11.1 mA |
| | Deep Sleep: average 6.2 mA |
| | Online Deep Sleep: average 6.5 mA |
| Battery charge current | Average 140 mA |
| Operating temperature (without battery) | -40..+85 °C |
| Storage temperature (without battery) | -40..+85 °C |
| Storage relative humidity | 5..95% (no condensation) |
| Device + case + battery weight | 52 g |

Dimension drawing:

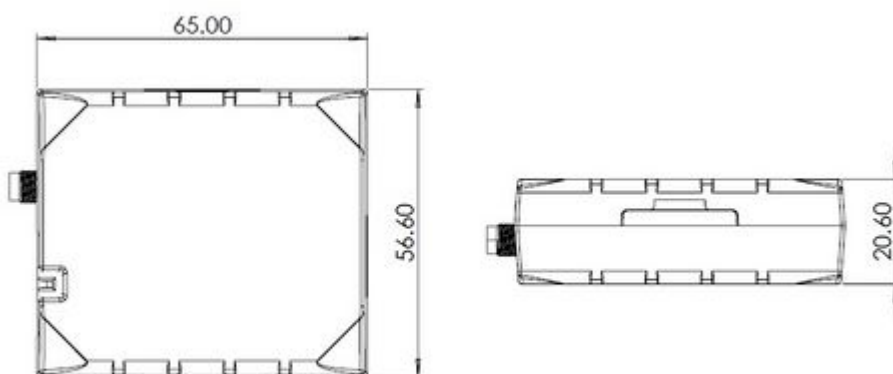

Technical information about internal battery

| Internal back-up battery | Battery voltage (V) | Nominal Capacity (mAh) | Power (Wh) | Charge temperature (°C) | Discharge temperature (°C) | Storage temperature (°C) |
|-----------------------------|---------------------|------------------------|-------------|-------------------------|----------------------------|---|
| Li-ion rechargeable battery | 3.75□3.90 | 170 | 0.64 - 0.66 | 0 to +45 | -20 to +60 | -20 to +45 for 1 month -20 to +35 for 6 months |

Batteries are covered by 6 month [warranty](#) support.

✘ CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Battery should not be disposed of into general household waste.

✘ Bring damaged or worn-out batteries to your local recycling center or dispose them into a battery recycle bin commonly found in supermarkets.

Electrical characteristics

| Characteristic description | Value | | | Unit |
|---|-------|------|----------------|------|
| | Min. | Typ. | Max. | |
| Supply Voltage: | | | | |
| Supply Voltage (Recommended Operating Conditions) | +10 | | +30 | V |
| Digital Output (Open Drain grade): | | | | |
| Drain current (Digital Output OFF) | | | 120 | μA |
| Drain current (Digital Output ON, Recommended Operating Conditions) | 0.1 | | 0.5 | A |
| Static Drain-Source resistance (Digital Output ON) | | 400 | 600 | mΩ |
| Digital Input: | | | | |
| Input resistance (DIN1) | 47 | | | kΩ |
| Input resistance (DIN2) | 51.7 | | | kΩ |
| Input voltage (Recommended Operating Conditions) | 0 | | Supply voltage | V |
| Input Voltage threshold (DIN1) | | 7.5 | | V |
| Input Voltage threshold (DIN2) | | 2.5 | | V |
| Analog Input: | | | | |
| Input voltage (Recommended Operating Conditions), Range 1 | 0 | | +10 | V |
| Input resistance, Range 1 | | 150 | | kΩ |
| Measurement error on 12V, Range 1 | | 3 | | % |
| Additional error on 12 V, Range 1 | | 360 | | mV |
| Measurement error on 30 V, Range 1 | | 3 | | % |

| | | | |
|---|------|------|----|
| Additional error on 30 V, Range 1 | 900 | | mV |
| Input Voltage (Recommended Operating Conditions), Range 0 2 | | +30 | V |
| Input resistance, Range 2 | 150 | | kΩ |
| Measurement error on 12V, Range 2 | 3 | | % |
| Additional error on 12 V, Range 2 | 360 | | mV |
| Measurement error on 30 V, Range 2 | 3 | | % |
| Additional error on 30 V, Range 2 | 900 | | mV |
| Output Supply Voltage 1-Wire: | | | |
| Supply voltage | +4.5 | +4.7 | V |
| Output inner resistance | 7 | | Ω |
| Output current ($U_{out} > 3.0$ V) | 30 | | mA |
| Short circuit current ($U_{out} = 0$) | 75 | | mA |
| RS232/RS485 Input Voltage: | | | |
| RS485 input voltage range on A or B pin (common-mode voltage) | -7 | +12 | V |
| RS232 input voltage range (common-mode voltage) | -15 | +15 | V |

✘ **Analog Input error margin can increase if temperature varies.**

Absolute maximum ratings

| Characteristic description | Value | | |
|---|-------|------|-----------|
| | Min. | Typ. | Max. Unit |
| Supply Voltage (Absolute Maximum Ratings) | -32 | +32 | V |
| Drain-Source clamp threshold voltage (Absolute Maximum Ratings), ($I_{drain} = 2$ mA) | | +36 | V |
| Digital Input Voltage (Absolute Maximum Ratings) | -32 | +32 | V |
| Analog Input Voltage (Absolute Maximum Ratings) | -32 | +32 | V |
| RS232 Input Voltage (Absolute Maximum Ratings) | -25 | +25 | V |