

[https://wiki.teltonika-gps.com/view/TAT140\\_Battery\\_Replacement\\_Instructions](https://wiki.teltonika-gps.com/view/TAT140_Battery_Replacement_Instructions)

# TAT140 Battery Replacement Instructions

[Main Page](#) > [Autonomous Trackers](#) > [TAT140](#) > [TAT140 Manual](#) > **TAT140 Battery Replacement Instructions**

PDF version of the instructions - [HERE](#).

Hardware version B2 (without the hole in the PCB) - [HERE](#).

## TATxyz Battery Replacement Instructions

1. Remove the cap (use something thin enough to fit the groove)




2. Using the hole in the PCB pull the board out




### 3. Unplug the battery



4. Take the battery out leaving the battery holder on the PCB

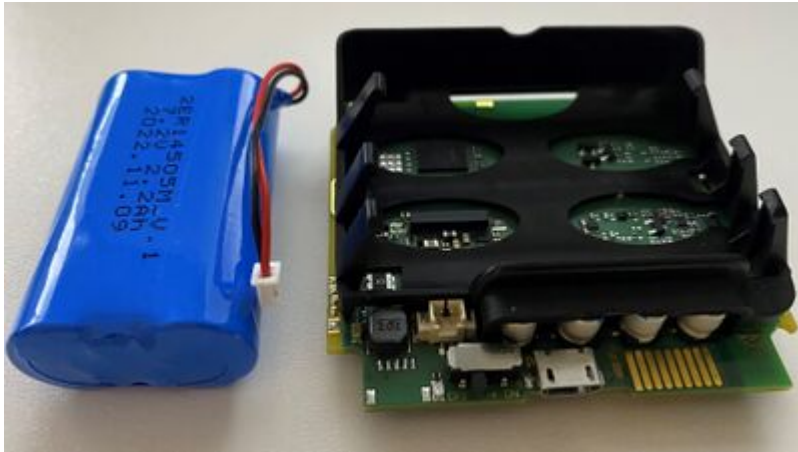

5. Place the new battery with cables facing the same way and connect it

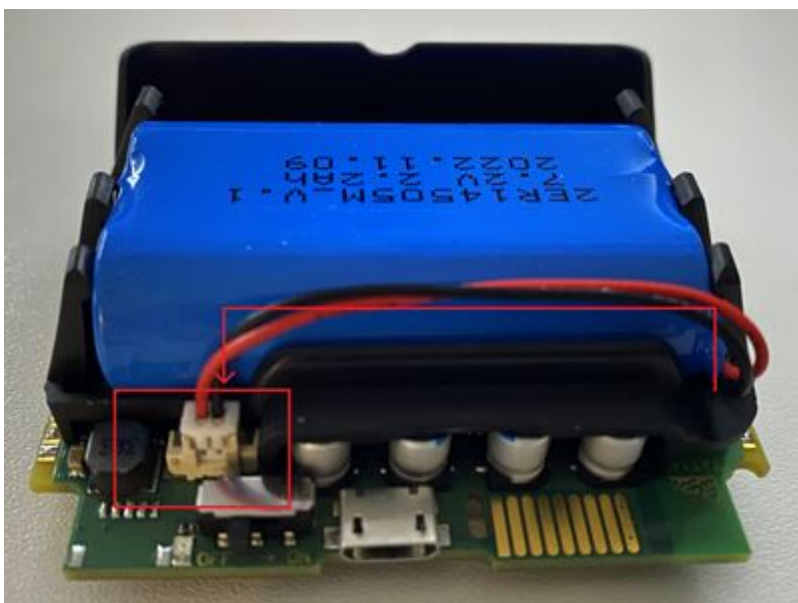

6. Place the PCB back into the housing with GNSS antenna facing the same side as the engraving on the case. Then close the cap.

