

FMB204 General description

[Main Page](#) > [Advanced Trackers](#) > [FMB204](#) > [FMB204 Manual](#) > **FMB204 General description**

FMB204 is a tracking terminal with GNSS and GSM connectivity, which is able to collect device coordinates and transfer them via GSM network to a server. This device is perfectly suitable for applications, which require the location acquirement of remote objects.

□

Contents

- [1 Package contents](#)
- [2 Basic characteristics](#)
- [3 Technical features](#)
- [4 Technical information about internal battery](#)
- [5 Electrical characteristics](#)
- [6 Absolute maximum ratings](#)

Package contents

The FMB204 device is supplied to the customer in a cardboard box containing all the equipment that is necessary for operation. The package contains:

- FMB204 device with case and wires;
- USB cable (optional);
- Integrated Li-ion battery 3.75V, 1800mAh for FMB204 device;

Basic characteristics

GSM / GPRS / GNSS features:

- Teltonika [TM2500](#) quad band module (GSM 850 / 900 / 1800 / 1900 MHz);
- GPRS Multi-Slot class 12 (Up to 85,6 kbps);
- SMS (text, data);
- Integrated GNSS receiver;
- Up to -165 dBm GNSS receiver sensitivity.

Hardware features:

- 128 MB internal Flash memory (422 400 Records);
- Built-in movement sensor;
- Integrated Li-ion battery 3.75V, 1800mAh for FMB204 device;
- Internal High Gain GSM antenna;
- Internal High Gain GNSS antenna;

The Interface features:

- Power supply: 6 ... 30V;
- USB port;
- 3 digital inputs;
- 1 analog input;
- 2 open collector digital outputs (connecting external relays, LED's, buzzers etc.);
- 1Wire® temperature sensor;
- 1Wire® iButton;
- 2 LED's indicating device status.

Special features:

- High Quality track even in high density urban canyon;
- Ready for harsh environment;
- Any element event triggers (external sensor, input, speed, temperature, etc.);
- Highly configurable data acquisition and sending;
- Multiple Geo-fence areas;
- Sleep mode;
- Deep sleep mode;
- Configurable scenarios available;
- Real-time process monitoring;
- Authorized number list for remote access;
- Firmware update over GPRS or USB port;
- Configuration update over GPRS, SMS or USB port;
- TCP/IP or UDP/IP protocol support;
- >500000 record storing;
- Overvoltage protection.

Description	Voltage	Duration
Normal operation	+6 ... +30 V	Unlimited
Protection turns on, device turns off	34 V	Unlimited
Maximum voltage	< 70 V	Unlimited
Maximum voltage impulse	120 V	10 ms

Technical features

Part name	Physical specification
Navigation indication	LED
Modem indication	LED
USB	Mini USB socket
GNSS	Internal GNSS antenna


GSM

Internal GSM
antenna

Technical details

	GPRS: average 40.1 mA r.m.s;
	Nominal: average 28.3 mA;
	GPS Sleep: average 15.7 mA;
Power supply 6 ... 30V DC	Online Sleep: average 4.2 mA;
1.5 W max. device consumption	Deep Sleep: average 3.9 mA;
Energy consumption at 12 V:	Ultra Sleep: average 2.1 mA
FMB20X Battery charge current	max. 207 mA
Operating temperature (without battery)	-40..+85 °C
Storage temperature (without battery)	-40..+85 °C
Storage relative humidity	5..95% (no condensation)
Device + case + battery weight	With 400 mAh bat. - 170 g With 1800 mAh bat. - 210 g

Dimension drawing:

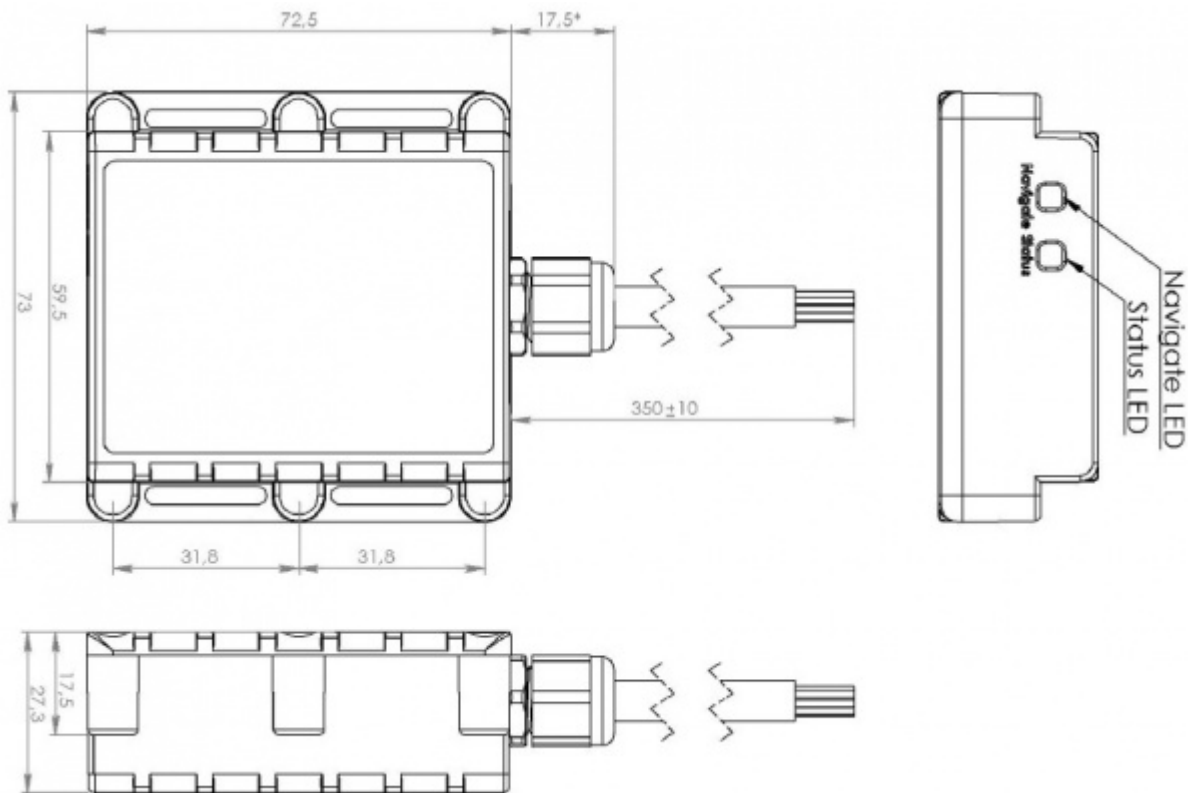

Technical information about internal battery

Internal back-up battery	Battery voltage (V)	Nominal capacity (mAh)	Power (Wh)	Charging temperature (°C)
Li-ion rechargeable battery	3.75~3.90	1800	6.75 - 7.02	0 - 50

Batteries are covered by 6 month [warranty](#) support.

- CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Battery should not be disposed of into general household waste.

- Bring damaged or worn-out batteries to your local recycling center or dispose them into a battery recycle bin commonly found in supermarkets.

Electrical characteristics

Characteristic description	Value			
	Min.	Typ.	Max.	Unit
Supply Voltage:				
Supply Voltage (Recommended Operating Conditions)	6		30	V
Digital Output (Open Drain grade):				
Drain current (Digital Output OFF)			120	µA
Drain current (Digital Output ON, Recommended Operating Conditions)	0.1		0.5	A
Static Drain-Source resistance (Digital Output ON)			120	mΩ
Digital Input:				
Input resistance (DIN1)		59.9		kΩ
Input resistance (DIN2, DIN3)		67.5		kΩ
Input voltage (Recommended Operating Conditions)	0		60	V
Input Voltage threshold (DIN1)	4	4	8	V
Input Voltage threshold (DIN2, DIN3)	2.5	2.7	3	V
Analog Input:				
Input voltage (Recommended Operating Conditions), Range 1	0		10	V
Input resistance, Range 1		120		kΩ
Input voltage (Recommended Operating Conditions), Range 2	0		30	V
Input resistance, Range 2		146.7		kΩ
Output Supply Voltage 1-Wire:				
Supply voltage		3.8		V
Output inner resistance	450		600	mΩ
Output current ($U_{out} > 3.0$ V)			75	mA

Short circuit current ($U_{out} = 0$)

75 mA

✘ **Analog Input error margin can increase if temperature varies.**

Absolute maximum ratings

Characteristic description	Value		
	Min.	Typ.	Max. Unit
Supply Voltage (Absolute Maximum Ratings)	-32		+32 V
Drain-Source clamp threshold voltage (Absolute Maximum Ratings), ($I_{drain} = 2$ mA)			+36 V
Digital Input Voltage (Absolute Maximum Ratings)	-32		+32 V
Analog Input Voltage (Absolute Maximum Ratings)	-32		+32 V