

Technoton DUT-E S7 Fuel Level Sensor

[Main Page](#) > [Accessories](#) > Technoton DUT-E S7 Fuel Level Sensor



Contents

- [1 Introduction to the product](#)
- [2 Declaration of Compatibility](#)
- [3 DUT-E S7 fuel level sensor connection](#)
- [4 Teltonika FMB connection](#)
- [5 Equipment and fuel level sensor calibration](#)
 - [5.1 Terminal settings in the Configurator](#)
 - [5.2 Connection of the fuel level sensor to the terminal](#)
- [6 Data on the telematics server](#)
 - [6.1 Temperature sensor configuration](#)
 - [6.2 Fuel level sensor configuration](#)
 - [6.3 DTCs mask sensor configuration](#)

Introduction to the product

DUT-E S7 Fuel Level Sensor connected to FMB using the Bluetooth® interface.



Declaration of Compatibility



DUT-E S7 fuel level sensor connection

The DUT-E S7 fuel level sensor is to be switched to the Working mode according to the operation manual.

To obtain the MAC address of the DUT-E S7 fuel level sensor, you need to transfer the sensor number from decimal to hexadecimal code.

107 001 300 025	
HEX	18 E9C6 4439
DEC	107 001 300 025
OCT	1 435 161 442 071
BIN	0001 1000 1110 1001 1100 0110 0100 0100 0011 1001
QWORD	MS
M*	

Teltonika FMB connection

Insert a SIM card and supply power to the TELTONIKA terminal.

NOTE: Firmware 03.27.01 Rev:00 or latest.

Equipment and fuel level sensor calibration

Terminal settings in the Configurator

Configure the GPRS data of the SIM card operator and the address of the telematic server:

NOTE: Configurator v1.6.4B.3.27 R2 or latest according to the firmware version.

Choose the protocol as shown below:



Connection of the fuel level sensor to the terminal

Put the sensors near the terminal.

Make 'Discovering' of the sensors:



Fill the MAC address in the field:



Configure the terminal for the data transfer from the fuel level sensor:



It is possible to connect up to 4 DUT-E S7 sensors.

The sensor settings are similar; you only need to change the MAC address.

None - PGN number (63277);

Fuel Frequency - frequency Hz DUT S7 (fuel level);

Temperature - temperature C0 of DUT S7;

Custom1 - Lateral acceleration m/s² (reserve);

Custom2 - Longitudinal acceleration m/s² (reserve);

Custom3 - Vertical acceleration m/s² (reserve);

Custom4 - DTCs mask.

Frequency, temperature, and DTCs mask data are displayed in the configurator. Press the Low button to select the parameter to be sent to the server:




BLE Temperature 1 - temperature C0;
BLE 1 Custom4 - DTCs mask.
BLE Fuel Frequency 1 - frequency Hz (fuel level).

At the moment, the accelerometer is not implemented in the current DUT-E S7 firmware:
Custom1 - Lateral acceleration m/s² (reserve);
Custom2 - Longitudinal acceleration m/s² (reserve);
Custom3 - Vertical acceleration m/s² (reserve);
FFFF (65535) values are transmitted on three planes.

Data on the telematics server

Sign in the terminal on the telematics server.
Configure the temperature and fuel level sensors DTCs masks.
The data on the server will look like this:

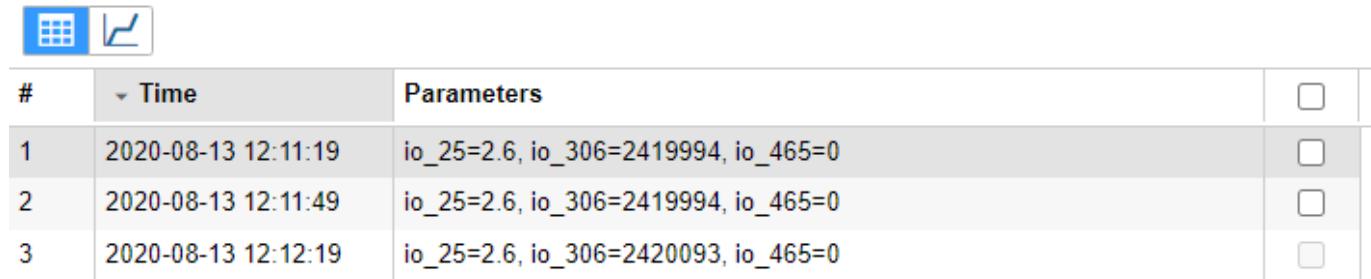

#	Time	Parameters	
1	2020-08-13 12:11:19	io_25=2.6, io_306=2419994, io_465=0	<input type="checkbox"/>
2	2020-08-13 12:11:49	io_25=2.6, io_306=2419994, io_465=0	<input type="checkbox"/>
3	2020-08-13 12:12:19	io_25=2.6, io_306=2420093, io_465=0	<input type="checkbox"/>

Sensors configuration:



Temperature sensor configuration



Fuel level sensor configuration



Calibrate the fuel level sensor, the ratio of the output frequency to the volume of fuel in the tank:



DTCs mask sensor configuration



The configures sensors will look like:

