

FMB122 General description

[Main Page](#) > [Advanced Trackers](#) > [FMB122](#) > [FMB122 Manual](#) > **FMB122 General description**

FMB122 is a tracking terminal with GNSS and GSM connectivity, which is able to collect device coordinates and transfer them via GSM network to a server. This device is perfectly suitable for applications, which require the location acquirement of remote objects.

□

Contents

- [1 Package contents](#)
- [2 Basic characteristics](#)
- [3 Technical features](#)
- [4 Technical information about internal battery](#)
- [5 Electrical characteristics](#)
- [6 Absolute maximum ratings](#)

Package contents

The FMB122 device is supplied to the customer in a cardboard box containing all the equipment that is necessary for operation. The package contains:

- FMB122 device;
- Input and output power supply cable with 2x6 connection pins;
- Micro USB cable;
- 3.7 V 170 mAh rechargeable Li-ion battery;
- GNSS antenna.

Basic characteristics

GSM / GPRS / GNSS features:

- Teltonika [TM2500](#) quad band module (GSM 850 / 900 / 1800 / 1900 MHz);
- GPRS Multi-Slot class 12 (Up to 85,6 kbps);
- SMS (text, data);
- Integrated GNSS receiver;
- Up to -165 dBm GNSS receiver sensitivity.

Hardware features:

- Built-in movement sensor;
- Built-in Bluetooth 4.0 LE;
- External High Gain GNSS antenna;
- Internal High Gain GSM antenna;
- Internal flash memory 128MB (422 400 Records);

- 170 mAh Li-ion rechargeable 3.7 V battery.

Interface features:

- Power supply: +10... +30 V;
- 2 digital inputs;
- 1 analog input;
- 1 configurable input DIN3 or AIN2;
- 2 open collector digital outputs (connecting external relays, LED, buzzers etc);
- 1-Wire temperature sensor;
- 1-Wire iButton;
- LVCAN RX (INPUT 5);
- LVCAN TX (INPUT 6);
- 2 LEDs indicating device status.

Special features:

- Fast position fix (Outdoor areas);
- High Quality track even in high density urban canyon;
- Ultra small case;
- Ready for harsh environment;
- Easy to mount in limited access areas;
- Firmly fasten;
- 2 LED status indication;
- Real time tracking;
- Smart data acquisition based on:
 - Time;
 - Speed;
 - Angle;
 - Distance;
 - Ignition or any other I/O event;
- Sending acquired data via GPRS;
- GPRS and SMS I/O events;
- Virtual odometer;
- Jamming detection;
- Configurable using Secured SMS Commands;
- 1x micro SIM card; 1x eSIM;
- Overvoltage protection;

Description	Voltage	Duration
Normal operation	+10 ... +30 V	Unlimited
Protection turns on, device turns off	34 V	Unlimited
Maximum voltage	< 70 V	Unlimited
Maximum voltage impulse	90 V	5 ms


Technical features

Part name	Physical specification
Navigation indication	LED
Modem indication	LED
Socket	Soldered inner socket
USB	Micro USB socket
GNSS	External GNSS antenna
GSM	Internal GSM antenna

Technical details

2 W max. Current consumption at 12 V (Power supply 6...30 V DC)	GPRS: average 64.97 mA rms
	Nominal: average 33.60 mA rms
	GNSS sleep: average 19.00 mA
	Deep Sleep: average 7.16 mA
	Online Deep Sleep: average 10.36 mA
	Ultra Deep Sleep: average 5.97 mA
	Average 140 mA
Battery charge current	Average 140 mA
Operating temperature (without battery)	-40..+85 °C
Storage temperature (without battery)	-40..+85 °C
Storage relative humidity	5..95% (no condensation)
Device + case + battery weight	51 g

Dimension drawing:

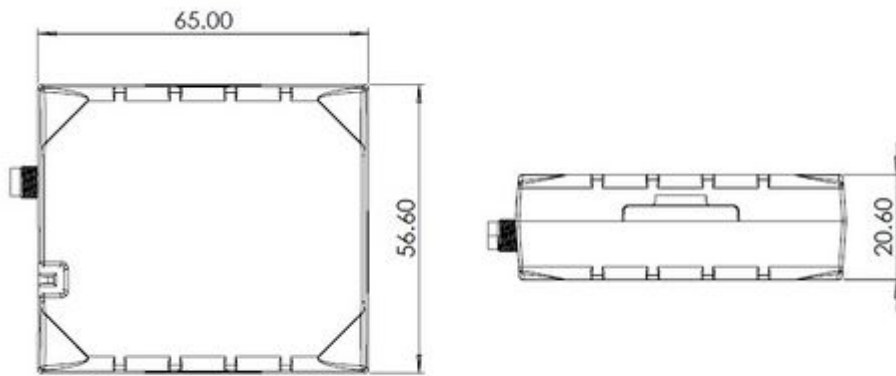

Technical information about internal battery

Internal back-up battery	Battery voltage (V)	Nominal Capacity (mAh)	Power (Wh)	Charge temperature (°C)	Discharge temperature (°C)	Storage temperature (°C)
Li-ion rechargeable battery	3.75□3.90	170	0.64 - 0.66	0 to +45	-20 to +60	-20 to +45 for 1 month -20 to +35 for 6 months

Batteries are covered by 6 month [warranty](#) support.

- ✘ CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Battery should not be disposed of into general household waste.

- ✘ Bring damaged or worn-out batteries to your local recycling center or dispose them into a battery recycle bin commonly found in supermarkets.

Electrical characteristics

Characteristic description	Value		
	Min.	Typ.	Max. Unit
Supply Voltage:			
Supply Voltage (Recommended Operating Conditions)	+10	+30	V
Digital Output (Open Drain grade):			
Drain current (Digital Output OFF)		120	μA
Drain current (Digital Output ON, Recommended Operating Conditions)	0.1	0.5	A
Static Drain-Source resistance (Digital Output ON)	400	600	mΩ

Digital Input:

Input resistance (DIN1)	47		kΩ
Input resistance (DIN2)	51.7		kΩ
Input resistance (DIN3)	47		kΩ
Input voltage (Recommended Operating Conditions)	0	Supply voltage	V
Input Voltage threshold (DIN1)	7.5		V
Input Voltage threshold (DIN2)	2.5		V
Input Voltage threshold (DIN3)	2.5		V

Analog Input:

Input voltage (Recommended Operating Conditions), Range 1	0	+10	V
Input resistance, Range 1	150		kΩ
Measurement error on 12V, Range 1	3		%
Additional error on 12 V, Range 1	360		mV
Measurement error on 30 V, Range 1	3		%
Additional error on 30 V, Range 1	900		mV
Input Voltage (Recommended Operating Conditions), Range 2	0	+30	V
Input resistance, Range 2	150		kΩ
Measurement error on 12V, Range 2	3		%
Additional error on 12 V, Range 2	360		mV
Measurement error on 30 V, Range 2	3		%
Additional error on 30 V, Range 2	900		mV
Output Supply Voltage 1-Wire:			
Supply voltage	+4.5	+4.7	V
Output inner resistance	7		Ω
Output current ($U_{out} > 3.0$ V)	30		mA
Short circuit current ($U_{out} = 0$)	75		mA

✘ **Analog Input error margin can increase if temperature varies.**

Absolute maximum ratings

Characteristic description	Value		
	Min.	Typ.	Max. Unit
Supply Voltage (Absolute Maximum Ratings)	-32	+32	V
Drain-Source clamp threshold voltage (Absolute Maximum Ratings), ($I_{drain} = 2$ mA)		+36	V

Digital Input Voltage (Absolute Maximum Ratings)	-32	+32 V
Analog Input Voltage (Absolute Maximum Ratings)	-32	+32 V