

FMU125 I/O settings

[Main Page](#) > [EOL Products](#) > [FMU125](#) > [FMU125 Configuration](#) > **FMU125 I/O settings**

□

Contents

- [1 Input Name](#)
- [2 Current Value](#)
- [3 Units](#)
- [4 Priority](#)
 - [4.1 None Priority](#)
 - [4.2 Low Priority](#)
 - [4.3 High Priority](#)
 - [4.4 Panic Priority](#)
- [5 High and Low Level](#)
- [6 Event Only](#)
- [7 Operands](#)
 - [7.1 Operand On Exit](#)
 - [7.2 Operand On Entrance](#)
 - [7.3 Operand On Both](#)
 - [7.4 Operand Monitoring](#)
 - [7.5 Operand On Hysteresis](#)
 - [7.6 Operand On Change](#)
 - [7.7 Operand On Delta Change](#)
- [8 Avg Const](#)
- [9 Send SMS To](#)
- [10 SMS Text](#)
- [11 FMU125 RS-232/RS-485 parameter configuration](#)
 - [11.1 RS-232 modes](#)
 - [11.1.1 RS-232 baudrate and parity](#)
 - [11.1.2 RS-232 TCP Binary mode settings](#)
 - [11.1.3 RS-232 Garmin mode settings](#)
 - [11.2 RS-485 modes](#)
 - [11.2.1 RS-485 baudrate](#)
 - [11.2.2 RS-485 LLS sensors](#)

When no I/O element is enabled, AVL packet comes with GNSS information only. After enabling I/O element(s) AVL packet contains current value(s) of enabled I/O element(s) along with GNSS information.

Input Name

I/O element name.

Current Value

If device is connected to **Configurator** all current I/O values are displayed in this column. Also I/O current values can be seen in [Status→I/O Info](#) tab.

Units

Units of measurement.

Priority

This field allows to enable I/O elements and setting them a priority so they are added to the data packet, which is sent to the server. By default **12 I/O elements** with **Low priority** are enabled: Ignition, Movement, Data Mode, GSM Signal, Sleep Mode, GNSS Status, GNSS PDOP, GNSS HDOP, External Voltage, Speed, Battery Current, Battery Voltage. All records made by FMU125 are regular, and regular packets are sent as low priority records.

Priority level (AVL packet priority) can be:

None Priority

Module doesn't make additional record.

Low Priority

Module makes an additional record with an indication that the **event was caused by an I/O element change** (depending on [Operands](#) configuration).

High Priority

Module makes an additional record with High priority flag and **sends event packet immediately** to the server using **GPRS**.

Panic Priority

This priority triggers same actions as **High priority**, but if GPRS fails, it sends an AVL packet using **SMS data** if SMS data sending is enabled and the number is provided in [SMS/Call Settings](#).

High and Low Level

These levels define I/O value range. If I/O value **enters or exits** this range, FMU125 **generates an event**.

Event Only

When this is selected, I/O element status value will be **appended only to eventual records**, otherwise I/O element status value will appear in each AVL record.

Operands

Defines when to generate event: [On Exit](#), [On Entrance](#), [On Both](#), [Monitoring](#), [On Hysteresis](#), [On Change](#) or [On Delta Change](#).

Operand On Exit

Record is generated when input value leaves a range between low and high level limits.



Operand On Entrance

Record is generated when input value enters a range between low and high level limits.



Operand On Both

Record is generated by both *On Exit* and *On Entrance* operands' logic at same time.




Operand Monitoring

No event at all. Values are recorded only when other triggers worked.



Operand On Hysteresis

Record is generated when input value crosses the high limit value from below the low limit value or vice versa.

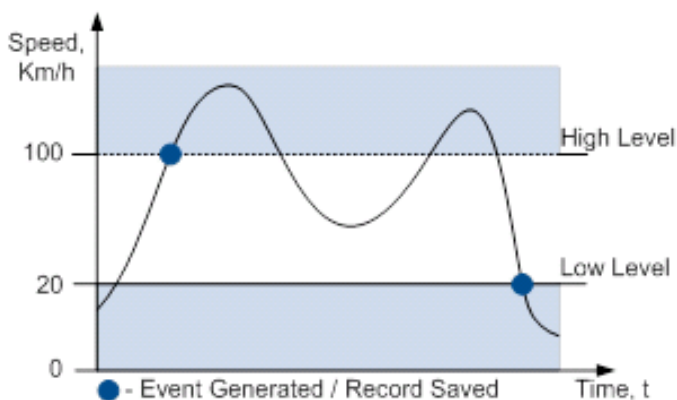

Operand On Change

Record is generated when input value changes.



Operand On Delta Change

Record is generated when input value changes and the absolute change becomes equal to or higher than the limit value.



Avg Const

If *Avg Const* value is 10, new value must be present for 1 second to register the change to a new value. Internal sampling is done every 40 ms, so 25 samples are taken per second. To configure 5 seconds of averaging multiply 10 by 5 yielding 50 as *Avg Const* value. The same logic works if the device is in [Deep Sleep mode](#).

Averaging follows RC exponential curve, see image below:



For Boolean values of 5τ , values is used, that means value change is taken when new values is averaged to more than 99.3%.

Send SMS To

Sends SMS notification about event to selected number from [SMS/Call Settings GSM Predefined Numbers](#) list if event priority is set to [Low](#), [High](#) or [Panic](#).

SMS Text

The SMS Text field can be altered and any text can be entered. Maximum message length is **160** symbols (numbers, letters and symbols in ASCII, except for comma “,”).

SMS Event Text may be either in default or composed format.

Default format:

Date, time, longitude, latitude, 'SMS text', value

Example:

```
2018/11/02 12:00:00 Lon:0.000000 Lat:0.000000 Alarm 1
```

Composed format:

Composed format may consist of text and defined commands which start with % symbol.

Supported commands:

Command	Description
imei	IMEI
fw	Firmware version
fullfw	Full firmware version
modem	Modem firmware version
gnss	GPS firmware version
vin	OBD VIN number
lat	Latitude (non-float value)
lon	Longitude (non-float value)
sat	Satellites in use
time	Timestamp
din1	Digital Input 1
din2	Digital Input 2
din3	Digital Input 3
ain1	Analog Input 1
out1	Digital Output 1
out2	Digital Output 2
pdp	PDOP
hdp	HDOP
exv	External Voltage
gmap	Google Maps link
mov	Movement
odo	Trip Odometer
op	GSM operator
spd	Speed
ib	iButton
mod	Data Mode
sig	GSM signal
slp	Sleep Mode
cel	Cell ID
lac	Area Code
tmp	Dallas Temperature 1
mac	BT MAC address
dtc	OBD fault codes
flat	Latitude (float value)
flon	Longitude (float value)
date	Date in yyyy/mm/dd format
datetime	Time in hh:mm:ss format
val	Eventual IO value
io'par_id'	Element value by parameter ID

Composed text example:


%imei Movement %io50010

Event SMS text:

352094082828606 Movement 1

If FMU125 is in [Deep Sleep](#) or [Ultra Deep Sleep](#) mode and an SMS event occurs with [Low priority](#) (which does not wake up FMU125), then the device does not send the message. It is saved to device memory until it wakes up from [Deep Sleep](#) or [Ultra Deep Sleep](#) [Sleep](#) mode and GSM modem starts working normally. After it wakes up, all the messages that are saved to memory will be sent, but keep in mind that only 10 messages can be saved to memory - all other messages will not be saved, until there is free memory space.

FMU125 RS-232/RS-485 parameter configuration

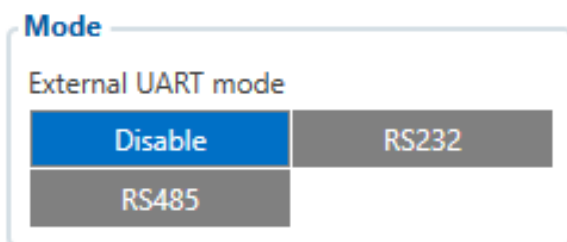

FMU-125 supports RS-232 and RS-485 serial standards and can be configured to work in different RS-232/RS-485 modes. More information about each mode is provided in [RS-232 and RS-485](#).

Only one mode may be selected at a time:

- [Disable](#) - Disable RS-232/RS-485 functionality;
- [RS232](#) - Select RS-232 functionality;
- [RS485](#) - Select RS-485 functionality.

RS-232 modes

RS-232 supports following modes:

- [Log Mode](#) - suitable for debugging/logging;
- [NMEA](#) - NMEA logs are transferred;
- [LLS](#) - LLS sensor support;
- [LCD](#) - external LCD support;
- [RFID HID](#) - RFID HID reader support;
- [RFID MF7](#) - RFID MF7 reader support;
- [Garmin FMI](#) - Garmin support;
- [TCP ASCII](#) - for routing any input string from external device to the server;
- [TCP Binary](#) - for routing any binary input data from external device to the server.

RS-232 baudrate and parity

Every RS-232 mode supports different baudrates, but each mode has its own default baudrate value. Default baudrate and parity values for each RS-232 mode are provided in the table below.

Mode	Default settings		
	RS-232		RS-485
	Baudrate	Parity	Baudrate
Log Mode	115200	None	115200
NMEA	115200		115200
LLS	19200		19200
LCD	57600		-
RFID HID	57600		-
RFID MF7	9600		-
Garmin FMI	9600		-
TCP ASCII	115200		57600
TCP Binary	115200		57600

RS-232 TCP Binary mode settings

The screenshot shows a window titled "TCP Binary Mode Settings". It contains three rows, each with a label and a control element:

- Prefix 1**: A text input field containing the number "0" and a small vertical spinner control with up and down arrows.
- Prefix 2**: A text input field containing the number "0" and a small vertical spinner control with up and down arrows.
- Prefix 3**: A text input field containing the number "0" and a small vertical spinner control with up and down arrows.

RS-232 *TCP Binary mode* has additional configurable parameters for advanced data filtering as shown on the right hand side figure.

RS-232 Garmin mode settings

The screenshot shows a window titled "Garmin Mode Settings". It contains a section labeled "Garmin Features" with two buttons below it:

- Ping Filter**: A dark grey button with white text.
- Unicode filter**: A dark grey button with white text.

Garmin FMI mode has additional filtering capabilities. It is possible to filter Ping and Unicode packets. If **Ping Filter** is enabled, then Ping packets are blocked. When **Unicode Filter** is enabled Unicode packets are not sent to the server. Both filters may be enabled for simultaneous effect.

RS-485 modes

RS-485 supports several modes:

- **Log Mode** - suitable for debugging/logging;
- **NMEA** - NMEA logs are transferred;
- **LLS** - LLS sensors support;
- **TCP ASCII** - for routing any input string from external device to the server;

- **TCP Binary** - for routing any binary input data from external device to the server.

RS-485 baudrate

Every RS-485 mode supports different baudrates, but each mode has its own default baudrate value. Default baudrate values for each RS-485 mode are provided in the table above.

RS-485 LLS sensors

RS485 LLS Sensors

LLS 1 Address	0	▼
LLS 2 Address	0	▼
LLS 3 Address	0	▼
LLS 4 Address	0	▼
LLS 5 Address	0	▼

LLS addresses may be configured for 5 LLS sensors. If at least one LLS sensor is connected to FMU125 when configuring device using configurator, LLS sensor ID will be entered automatically.