

FMB122 General description

[Main Page](#) > [Advanced Trackers](#) > [FMB122](#) > [FMB122 Manual](#) > **FMB122 General description**

FMB122 is a tracking terminal with GNSS and GSM connectivity, which is able to collect device coordinates and transfer them via GSM network to a server. This device is perfectly suitable for applications, which require the location acquirement of remote objects.



Contents

- [1 Package contents](#)
- [2 Basic characteristics](#)
- [3 Technical features](#)
- [4 Technical information about internal battery](#)
- [5 Electrical characteristics](#)
- [6 Absolute maximum ratings](#)

Package contents

The FMB122 device is supplied to the customer in a cardboard box containing all the equipment that is necessary for operation. The package contains:

- FMB122 device;
- Input and output power supply cable with 2x6 connection pins;
- Micro USB cable;
- 3.7 V 170 mAh rechargeable Li-ion battery;
- GNSS antenna.

Basic characteristics

GSM / GPRS / GNSS features:

- Teltonika [TM2500](#) quad band module (GSM 850 / 900 / 1800 / 1900 MHz);
- GPRS Multi-Slot class 12 (Up to 85,6 kbps);
- SMS (text, data);
- Integrated GNSS receiver;
- Up to -165 dBm GNSS receiver sensitivity.

Hardware features:

- Built-in movement sensor;
- Built-in Bluetooth 4.0 LE;
- External High Gain GNSS antenna;
- Internal High Gain GSM antenna;
- Internal flash memory 128MB (422 400 Records);

- 170 mAh Li-ion rechargeable 3.7 V battery.

Interface features:

- Power supply: +10... +30 V;
- 2 digital inputs;
- 1 analog input;
- 1 configurable input DIN3 or AIN2;
- 2 open collector digital outputs (connecting external relays, LED, buzzers etc);
- 1-Wire temperature sensor;
- 1-Wire iButton;
- LVCAN RX (INPUT 5);
- LVCAN TX (INPUT 6);
- 2 LEDs indicating device status.

Special features:

- Fast position fix (Outdoor areas);
- High Quality track even in high density urban canyon;
- Ultra small case;
- Ready for harsh environment;
- Easy to mount in limited access areas;
- Firmly fasten;
- 2 LED status indication;
- Real time tracking;
- Smart data acquisition based on:
 - Time;
 - Speed;
 - Angle;
 - Distance;
 - Ignition or any other I/O event;
- Sending acquired data via GPRS;
- GPRS and SMS I/O events;
- Virtual odometer;
- Jamming detection;
- Configurable using Secured SMS Commands;
- 1x micro SIM card; 1x eSIM;
- Overvoltage protection;

Description	Voltage	Duration
Normal operation	+10 ... +30 V	Unlimited
Protection turns on, device turns off	34 V	Unlimited
Maximum voltage	< 70 V	Unlimited
Maximum voltage impulse	90 V	5 ms


Technical features

Part name	Physical specification
Navigation indication	LED
Modem indication	LED
Socket	Soldered inner socket
USB	Micro USB socket
GNSS	External GNSS antenna
GSM	Internal GSM antenna

Technical details

	GPRS: average 64.97 mA rms
	Nominal: average 33.60 mA rms
2 W max.	GNSS sleep: average 19.00 mA
Current consumption at 12 V (Power supply 6...30 V DC)	Deep Sleep: average 7.16 mA
	Online Deep Sleep: average 10.36 mA
	Ultra Deep Sleep: average 5.97 mA
Battery charge current	Average 140 mA
Operating temperature (without battery)	-40..+85 °C
Storage temperature (without battery)	-40..+85 °C
Storage relative humidity	5..95% (no condensation)
Device + case + battery weight	51 g

Dimension drawing:

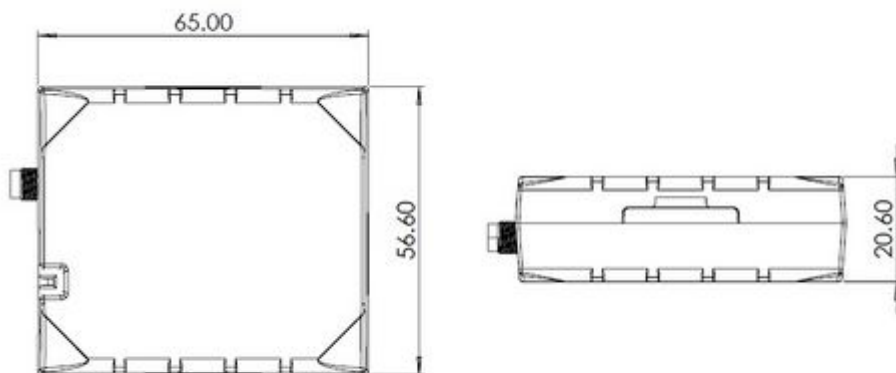

Technical information about internal battery

Internal back-up battery	Battery voltage (V)	Nominal Capacity (mAh)	Power (Wh)	Charge temperature (°C)	Discharge temperature (°C)	Storage temperature (°C)
Li-ion rechargeable battery	3.75□3.90	170	0.64 - 0.66	0 to +45	-20 to +60	-20 to +45 for 1 month -20 to +35 for 6 months

Batteries are covered by 6 month [warranty](#) support.

- ⚠ CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
- Battery should not be disposed of into general household waste.
- ⚠ Bring damaged or worn-out batteries to your local recycling center or dispose them into a battery recycle bin commonly found in supermarkets.

Electrical characteristics

Characteristic description	Value		
	Min.	Typ.	Max. Unit
Supply Voltage:			
Supply Voltage (Recommended Operating Conditions)	+10		+30 V
Digital Output (Open Drain grade):			
Drain current (Digital Output OFF)			120 μA
Drain current (Digital Output ON, Recommended Operating Conditions)	0.1		0.5 A
Static Drain-Source resistance (Digital Output ON)		400	600 mΩ

Digital Input:

Input resistance (DIN1)	47	kΩ
Input resistance (DIN2)	51.7	kΩ
Input resistance (DIN3)	47	kΩ
Input voltage (Recommended Operating Conditions)	0	Supply voltage
Input Voltage threshold (DIN1)	7.5	V
Input Voltage threshold (DIN2)	2.5	V
Input Voltage threshold (DIN3)	2.5	V

Analog Input:

Input voltage (Recommended Operating Conditions), Range 1	0	+10	V
Input resistance, Range 1	150		kΩ
Measurement error on 12V, Range 1	3		%
Additional error on 12 V, Range 1	360		mV
Measurement error on 30 V, Range 1	3		%
Additional error on 30 V, Range 1	900		mV
Input Voltage (Recommended Operating Conditions), Range 2	0	+30	V
Input resistance, Range 2	150		kΩ
Measurement error on 12V, Range 2	3		%
Additional error on 12 V, Range 2	360		mV
Measurement error on 30 V, Range 2	3		%
Additional error on 30 V, Range 2	900		mV
Output Supply Voltage 1-Wire:			
Supply voltage	+4.5	+4.7	V
Output inner resistance	7		Ω
Output current (U _{out} > 3.0 V)	30		mA
Short circuit current (U _{out} = 0)	75		mA

✖ Analog Input error margin can increase if temperature varies.

Absolute maximum ratings

Characteristic description	Value		
	Min.	Typ.	Max. Unit
Supply Voltage (Absolute Maximum Ratings)	-32	+32	V
Drain-Source clamp threshold voltage (Absolute Maximum Ratings), ($I_{drain} = 2$ mA)		+36	V

Digital Input Voltage (Absolute Maximum Ratings)	-32	+32	V
Analog Input Voltage (Absolute Maximum Ratings)	-32	+32	V